



APPLICATION  
EXAMPLE

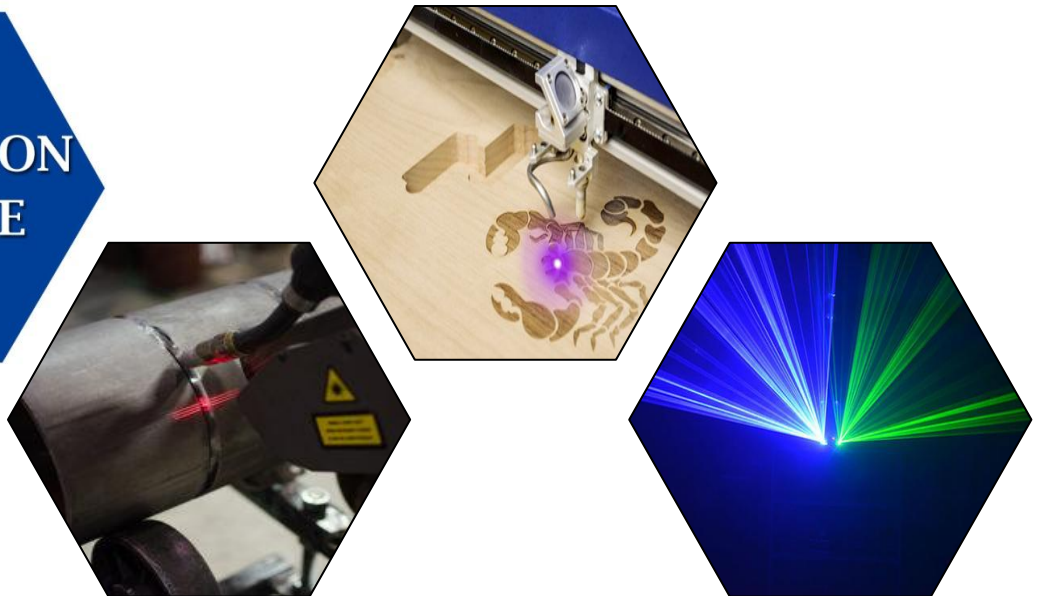

EXTERIOR  
DRAWING

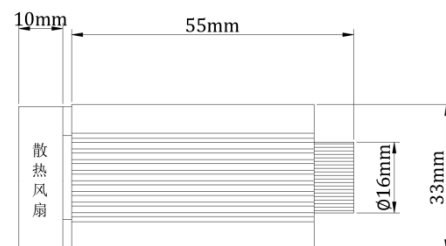

**PERFORMANCE INDEX**

**Optics**

Wavelength ( nm )	405-450nm
Wavelength Error	±10nm
Power(mw)	0.5W/1.6W
Light Type	Dot
Beam Angle	NA
Straightness	NA
Focus	Manual Focus

**Electrical**

Laser Driven mode	CW/TTL
Work Voltage(V)	12v
Work Current(mA)	<4500mA
Tail Line	DC Line/Black Line
Protection	Anti-reverse, Anti-interference

**Mechanical**

Dimension(mm)	33 ( L ) ×33 ( W ) ×55 ( H ) mm
Material	Black Aviation Aluminum

**Other**

Working Temperature	0 ~ 70°C ( Conventional )
Storage Temperature	-40 ~ 85°C ( Conventional )
Working Life	≥8000Hours